


COR Vision Plus

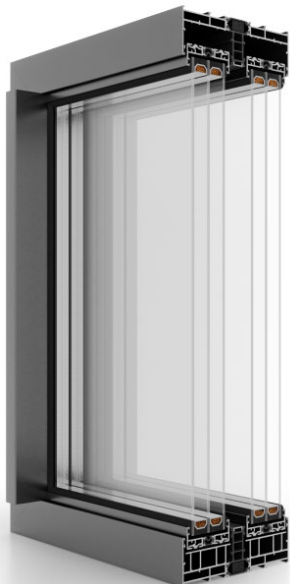

- ✓ profile with a construction depth of 7-1/8" (180 mm)
- ✓ Overall glazing thickness up to 2-1/8" (54 mm)
- ✓ depth of sash: 2-3/4" (69 mm)
- ✓ maximum size for construction – H up to 13' 1-1/2" (4000 mm) , L up to 13' 1-1/2" (4000 mm)
- ✓ maximum sash weight: 881 lb (manual), 1500 lb (motorized)
- ✓ we lacquer in the full RAL K7 color palette and, on request, in other colors (use powder code)

2

Guiding Rails

A minimalist aluminum sliding system designed for large glazing with a glass area of 94%. It allows for maximum illumination while minimizing the visible cross-sections of aluminum.

$U_w = 0.95 \text{ W/m}^2\text{K}$ for a 3200 x 2500 system with 6ESG/18Ar/6ESG/18Ar/6ESG glazing ($U_g = 0.5 \text{ W/m}^2\text{K}$)

*Coefficient calculated for doors with dimensions 3200 x 2500 mm.

SLIDING DOORS

ALUMINUM

WINDOWS

DOORS